



NOTES:


1. ALL JOINTS TO BE SET IN FLEXIBLE BUTYL RESIN SEALING COMPOUND AND PLASTERED WITH MORTAR 5/8" THICK AND EXTENDING 4" EACH SIDE OF JOINT INSIDE AND OUTSIDE.
2. MORTAR ON RISER RINGS IS ACCEPTABLE.
3. MANHOLES INSTALLED OUTSIDE OF STREET RIGHT-OF-WAY MAY REQUIRE LOCKING COVERS.
4. "SEWER" TO BE IMPRINTED ON COVER.

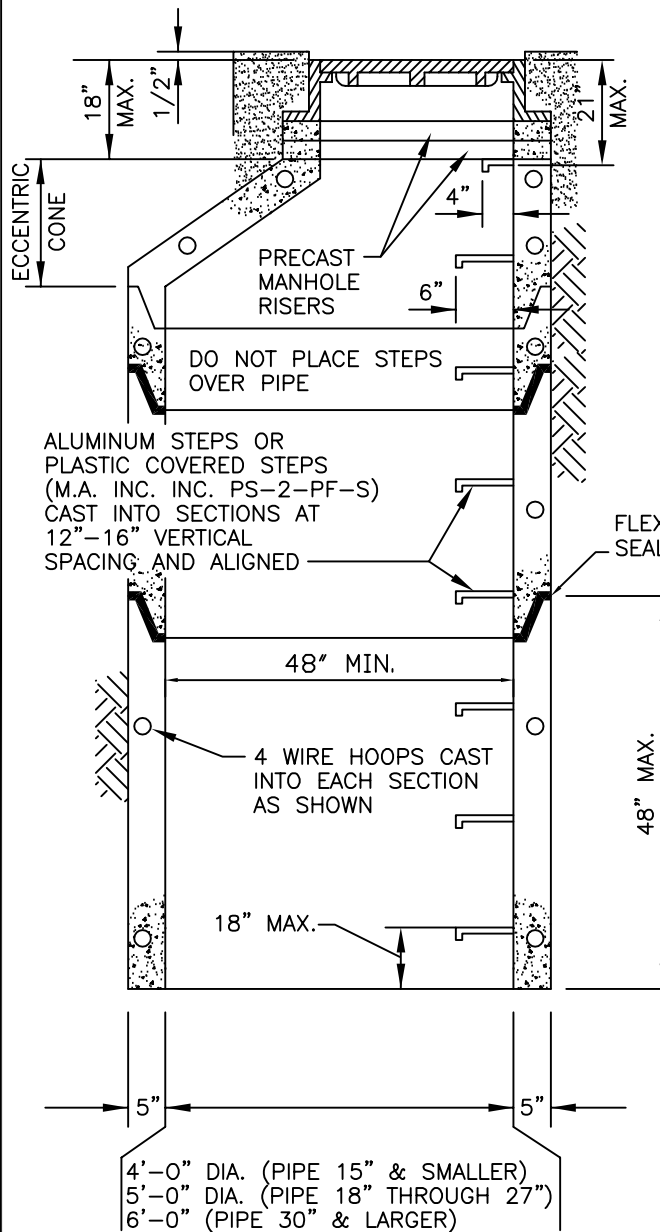

### TYPICAL MANHOLE SECTION WITH ECCENTRIC CONE

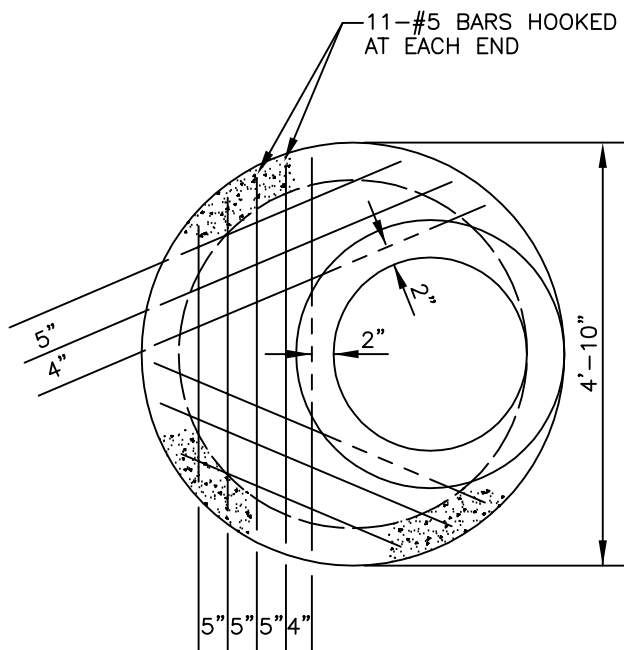

## PLAN

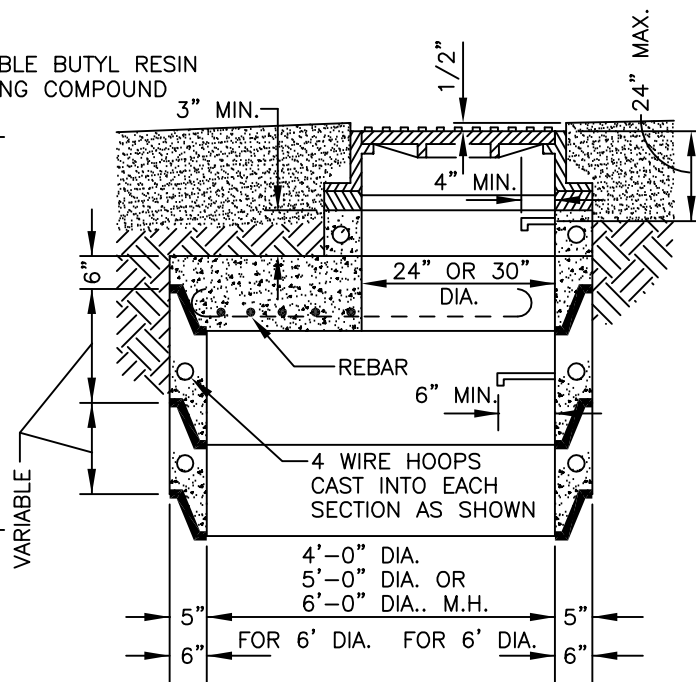

ALTERNATE FLAT TOP



CITY of DELTA  
360 MAIN STREET  
DELTA, CO 81416

## MANHOLE BARRELS AND ALTERNATE TOPS

DATE: DEC. 1998

SHEET SS2 OF 10